



Pan Pac

BCTMP

Safe Handling Advice



Stacking in Storage

Pan Pac recommends stacking our BCTMP to a maximum of 3 units (9 bales) high.



Moving

Pan Pac recommends clamp trucks such as Linde 1401 series, Kalmar DCG series (or similar). We recommend these are fitted with clamps such as Bolzoni Auramo BC-PF attachments.




Clamp trucks should be at least 12 tonne capacity to move 3 units at once.

Clamp attachments should open wider than the units to be lifted to minimise damage.

We do not recommend moving units by pulling the unit wires.

Wires

**Pan Pac uses Tree Island High Tensile Steel
Pulp Wire.**

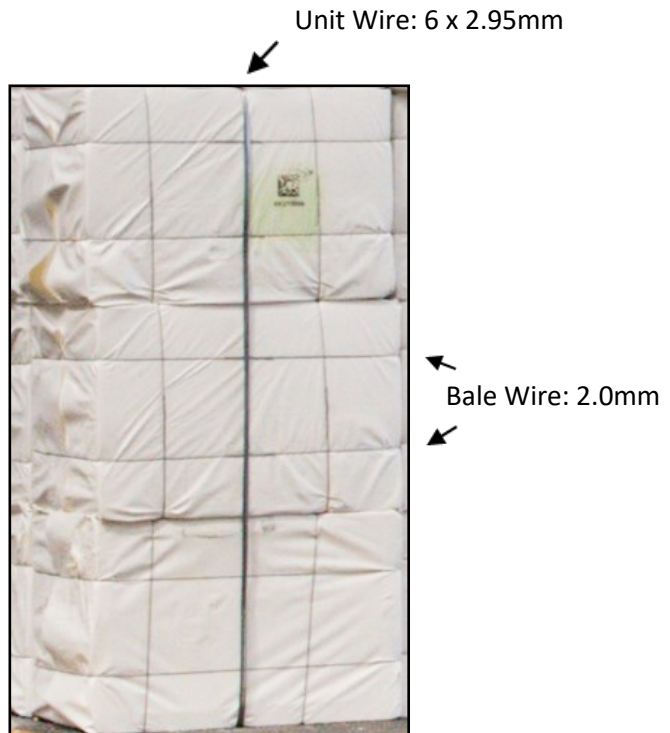

**Safety glasses or goggles must be worn when
cutting and removing wires.**

Weight

Pan Pac BCTMP is one of the heaviest pulps.

1 BALE is 270 kg (595 pounds).



1 UNIT of 6 BALES is 1,600 kg (3,527 pounds)

Storage Conditions

Clean and dry: preferably inside, or securely covered by tarpaulins.

Away from open flames or ignition source

Away from strong oxidants

Well ventilated: to reduce dust and fumes from machinery



Other Information

Pulp Wrapper:

Our wrapper is OBA-free Billerud Unglazed Kraft 100% Virgin Fibre 160 gsm.

Label Ink:

Our barcode is laser etched into Silmark LAQ-1064 produced by Siltech Ltd.

